


How to program your new Sommer 868Mhz hand transmitter to your electric operator:

How to program your new hand transmitter to your electric operator:

1. Locate the radio receiver part of the PCB on your operator.

You can find the radio receiver:

- DUO > under light cover
- SPRINT > take off control box housing
- MARATHON > clear plastic cover on the control box housing (code button).

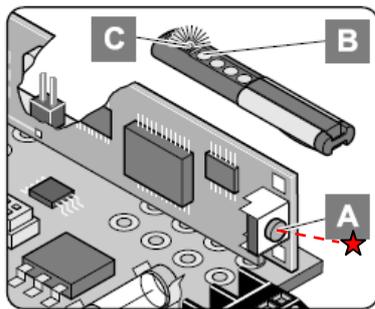

2. Press the button A' once and release.

3. Channel 1 red light shines. ★

4. Press the button on your hand transmitter that you wish to use to operate your door and hold.

5. Channel 1 red light ★ starts flashing.

6. After 2-3 seconds channel 1 red light goes out.

7. Release the hand transmitter button.

8. Coding of the hand transmitter is now complete.

9. Other buttons on your hand transmitter can be programmed to other doors by repeating this procedure.

The Sommer type RFSDT 868-1 plug-in receiver unit has a small grey button on the front for programming hand transmitters